
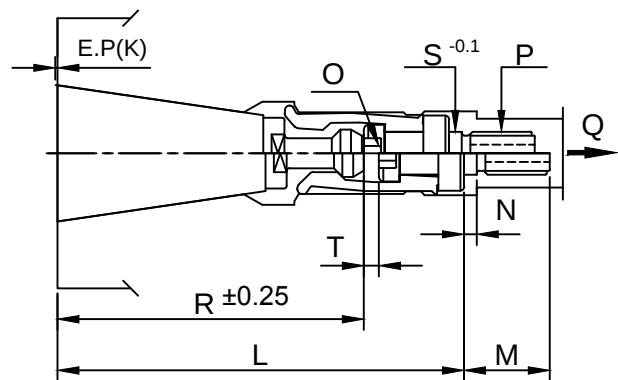


外螺紋瓣爪與尺寸 CB Gripper & Inside Spindle

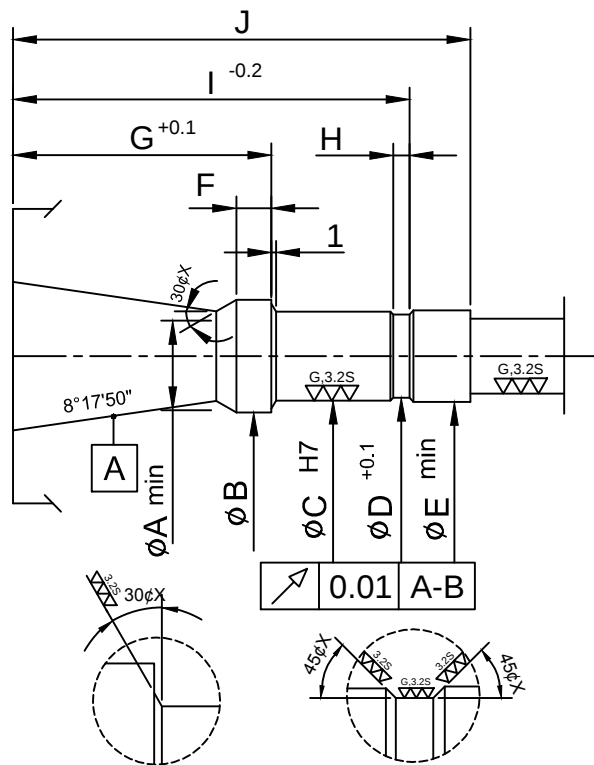

刀具規格	型式
DIN 69871/69872 ISO 7388/1/1 Type A	DIN
ANSI B 5.50-78 ISO 7388/1/2 Type B	CAT
MAS 403-1982 BT/PT 2 (30°)	BT2
MAS 403-1982 BT/PT 1 (45°)	BT1

mm

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O(QxNm)	P	Q(Kn)	R	S	T
DIN- 30	19	24	19	17.8	19.5	7.5	55.15	3.5	84.65	97.5	1	94.7	20	3	5mm-12	M10xP1.5	8	71.8	10	3.5
CAT-30	19	24	19	17.8	19.5	7.5	55.15	3.5	84.65	97.5	1.6	94.7	20	3	5mm-12	M10xP1.5	8	59.4	10	2.5
BT-30(1,2)	19	24	19	17.8	19.5	7.5	55.15	3.5	84.65	97.5	1	94.7	20	3	5mm-12	M10xP1.5	8	71.4	10	3.5
DIN-40	28	35	28	26.4	28.5	10	78.4	4.5	120.4	135	0.65	138.4	26	4	6mm-22	M16xP1.5	16	94.4	15	5
CAT-40	28	35	28	26.4	28.5	10	78.4	4.5	120.4	135	1.6	138.4	26	4	6mm-22	M16xP1.5	16	84.65	15	4
BT-40(1,2)	28	35	28	26.4	28.5	10	78.4	4.5	120.4	135	0.65	138.4	26	4	6mm-22	M16xP1.5	16	100.4	15	5
DIN-50	43	54	43	40.4	43.5	16	117.8	5	170.8	195	1	191.8	35	5	10mm-160	M22xP1.5	25	135.7	22	8
CAT-50	43	54	43	40.4	43.5	16	117.8	5	170.8	195	1	191.8	35	5	10mm-160	M22xP1.5	25	127.3	22	8
BT-50(1,2)	43	54	43	40.4	43.5	16	117.8	5	170.8	195	1	191.8	35	5	10mm-160	M22xP1.5	25	146.8	22	8
DIN-60	62	77	62	58.6	62.5	23	179.6	6.5	234.1	276	1	271.6	40	5	17mm-450	M30xP1.5	50	201.6	30	10